



FEATURES

- Single stage, direct-driven
- Continuous, contactless, oil-free operation
- Energy efficient for substantial savings
- Minimal downtime
- Air-cooled, no water required
- Simple installation
- Virtually maintenance-free
- Low noise levels
- Integrated relief valve
- Includes inlet filter with inlet silencer

APPLICATIONS

Any oil-free application including:


- Transport
- Conveying
- Environmental
- Air sparging
- Fish farms
- Aeration

OPTIONAL ACCESSORIES

- **Pre-Assembled Pressure Kit Available (KPRCP-252):** All plumbing, filtration, and gauges required for quick installation and easy maintenance.

PERFORMANCE (60HZ)



RCP-252

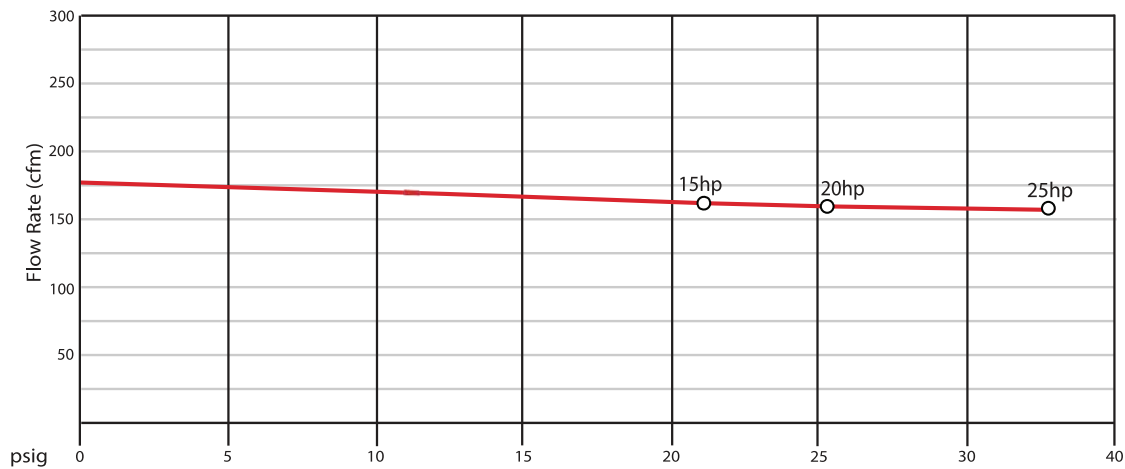

Model	Phase	Displacement (cfm)	Pressure (psig)	hp	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Gear Oil Amt. (L)
RCP-252-15	3	177	20.3	15.0	3450	230/460	34.80/17.4	82	476	0.9
RCP-252-20	3	177	24.7	20.0	3450	230/460	46.4/23.2	82	476	0.9
RCP-252-25	3	177	31.9	25.0	3450	230/460	57.8/28.9	82	476	0.9

*All measurements are $\pm 10\%$. Standard motor is Class 1 Div 2. *Uses a NEMA motor with a 1.25 service factor.

APPROXIMATE DIMENSIONS

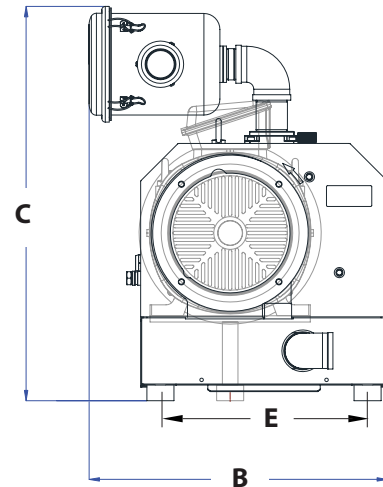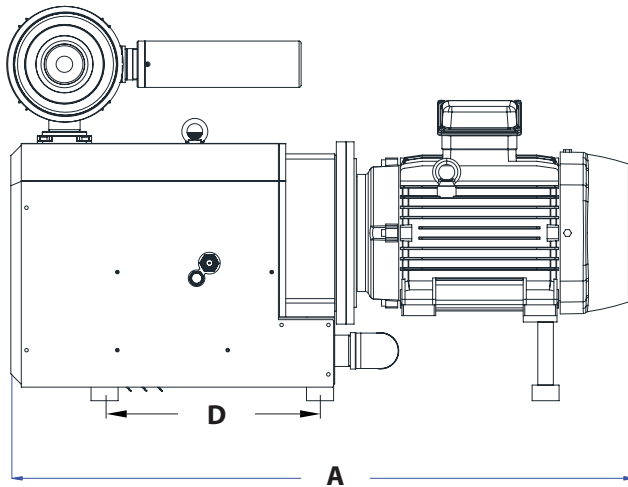

Model	A	B	C	D	E	Inlet	Discharge
RCP-252-15	46.1"	22.6"	29.8"	19.3"	15.7"	2.0" NPT	2.0" NPT
RCP-252-20	46.1"	22.6"	29.8"	19.3"	15.7"	2.0" NPT	2.0" NPT
RCP-252-25	46.1"	22.6"	29.8"	19.3"	15.7"	2.0" NPT	2.0" NPT

Please contact the factory for precise dimensions.

CONTACT

