



FEATURES

- Single stage, direct-driven
- Continuous, contactless, oil-free operation
- Energy efficient for substantial savings
- Minimal downtime
- Air-cooled, no water required
- Simple installation
- Virtually maintenance-free
- Low noise levels
- Integrated relief valve
- Includes inlet filter with inlet silencer

APPLICATIONS


Any oil-free application including:

- Transport
- Conveying
- Environmental
- Air sparging
- Fish farms
- Aeration

OPTIONAL ACCESSORIES

- Pre-Assembled Pressure Kit Available (KPRCP-62c): All plumbing, filtration, and gauges required for quick installation and easy maintenance.


PERFORMANCE (60HZ)

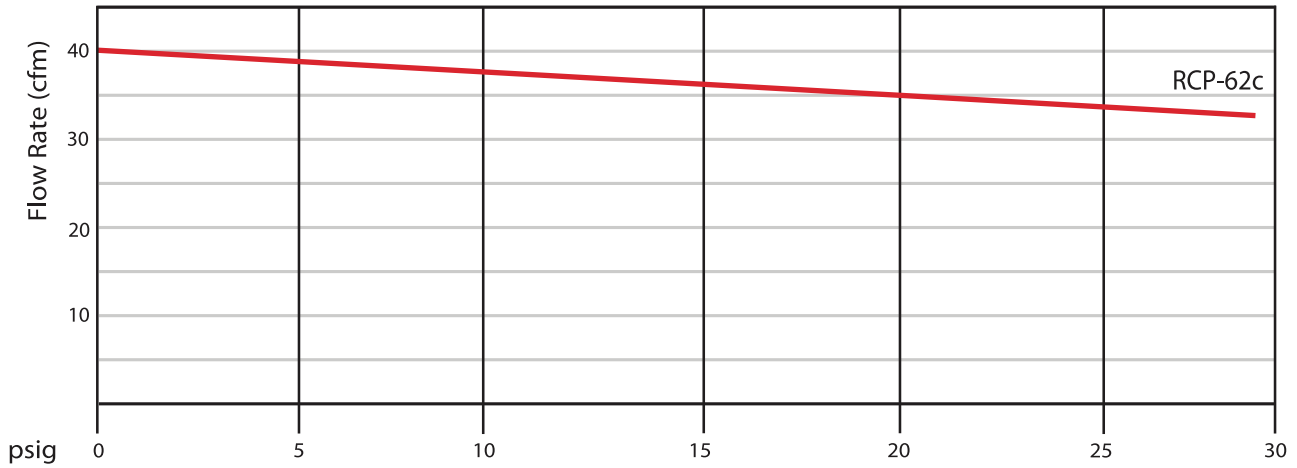

Model	Phase	Displacement (cfm)	Pressure (psig)	hp	Motor Speed (RPM)	Voltage (V)	FLA	Noise Level (dBA)	Approx. Weight (lb)	Gear Oil Amt. (L)
RCP-62c	3	40	29.0	5.0	3450	230/460	11.8/5.9	80	165	0.6
RCP-62c-SP	1	40	29.0	5.0	3600	208-230	21.2/19.2	80	165	0.6

All measurements are ±10%. Standard motor is Class 1 Div 2.

APPROXIMATE DIMENSIONS

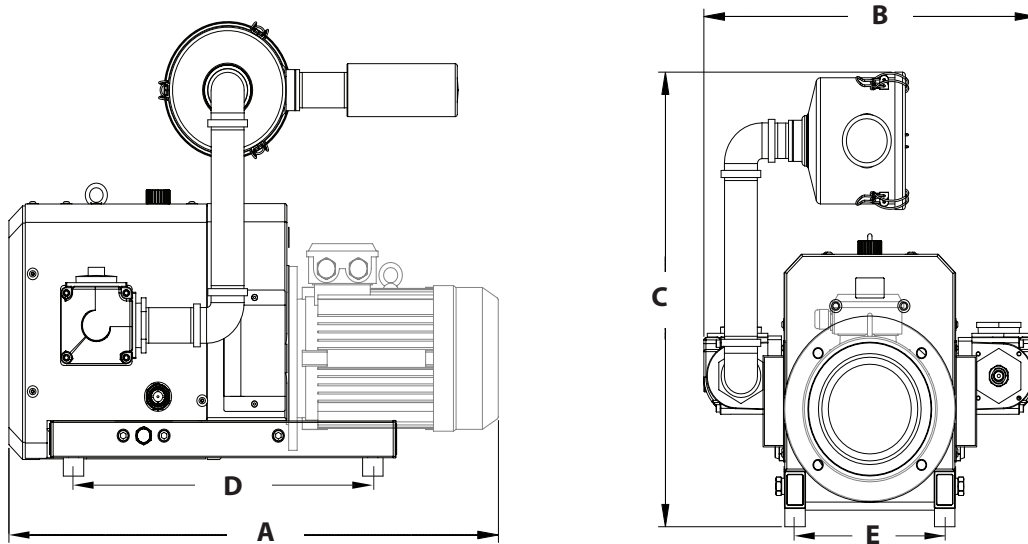

Model	A	B	C	D	E	Inlet	Outlet
RCP-62c	31.7"	11.7"	18.2"	11"	5.7"	1.00" NPT	1.00" NPT

Please contact the factory for precise dimensions.

